MSZ-BT20/25/35/50VG(K)

R32
Single / Multi

MSZ-BT SERIES

High Energy Efficiency for Entire Range of Series

DC Inverter | 20-50 SEER A++ | 20-35 SCOP A++

All models in the series, from the low-capacity 20 to the high-capacity 50, have achieved the "Rank A++" for SEER and size 25 and 35 have achived the "Rank A++" for SCOP as energy-savings rating. For home use, such as in bedrooms and living rooms, to light commercial use, such as in offices, our air conditioners are contributing to reduced energy consumption in a wide range.

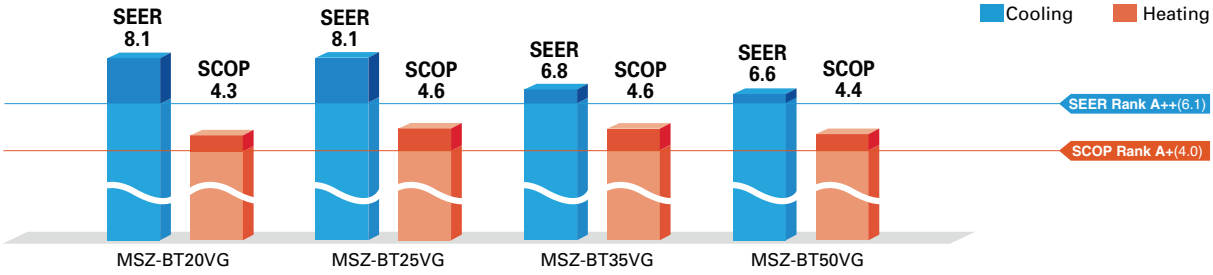

Quiet Operation

The indoor unit noise level is as low as 19dB for AP Series, offering a peaceful inside environment.

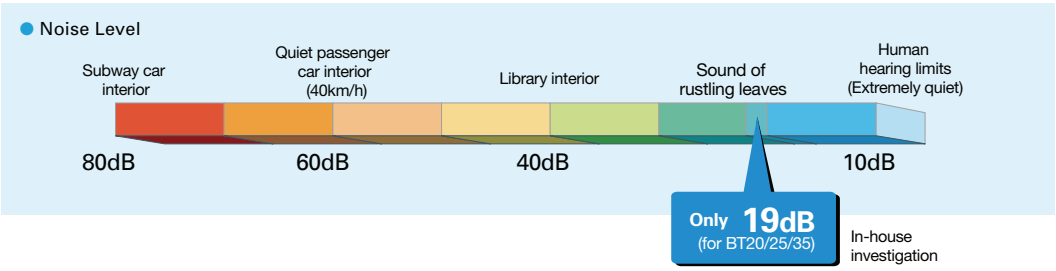

New Remote Controller

New stylish and compact remote controller features easy-read big display and simple button position with fundamental functions.

Built-in Wi-Fi Interface

(MSZ-BT20/25/35/50VGK) Wi-Fi Interface

The indoor unit is equipped with a Wi-Fi Interface inside an exclusive pocket in the unit.
This eliminates the need to install a Wi-Fi interface, and also contributes to the beautiful appearance since the interface is hidden.

MSZ-BT SERIES

Indoor Unit R32

MSZ-BT20/25/35/50VG(K)

Outdoor Unit

MUZ-BT20VG

MUZ-BT25/35VG

MUZ-BT50VG

Remote Controller

Type				Inverter Heat Pump			
Indoor Unit				MSZ-BT20VG	MSZ-BT25VG	MSZ-BT35VG	MSZ-BT50VG
Outdoor Unit				MUZ-BT20VG	MUZ-BT25VG	MUZ-BT35VG	MUZ-BT50VG
Refrigerant				R32(*1)			
Power Supply	Source			Outdoor Power supply			
	Outdoor (V / Phase / Hz)			230V/Single/50Hz			
Cooling	Design load		kW	2.0	2.5	3.5	5.0
	Annual electricity consumption (*2)		kWh/a	86	108	180	265
	SEER (*4)			8.1	8.1	6.8	6.6
		Energy efficiency class		A++	A++	A++	A++
	Capacity	Rated	kW	2.0	2.5	3.5	5.0
		Min-Max	kW	0.5-2.9	0.5-3.0	0.9-3.5	1.3-5.0
	Total Input	Rated	kW	0.450	0.700	1.240	2.050
Heating (Average Season)(*5)	Design load		kW	1.5 (-10°C)	1.9 (-10°C)	2.4 (-10°C)	3.8 (-10°C)
	Declared Capacity	at reference design temperature	kW	1.5 (-10°C)	1.9 (-10°C)	2.4 (-10°C)	3.8 (-10°C)
		at bivalent temperature	kW	1.5 (-10°C)	1.9 (-10°C)	2.4 (-10°C)	3.8 (-10°C)
		at operation limit temperature	kW	1.3 (-15°C)	1.7 (-15°C)	2.1 (-15°C)	3.4 (-15°C)
	Back up heating capacity		kW	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)
	Annual electricity consumption (*2)		kWh/a	487	577	727	1209
	SCOP (*4)			4.3	4.6	4.6	4.4
		Energy efficiency class		A+	A++	A++	A+
	Capacity	Rated	kW	2.5	3.15	3.6	5.4
		Min-Max	kW	0.7-3.2	0.7-3.5	0.9-4.1	1.4-6.5
	Total Input	Rated	kW	0.550	0.750	0.930	1.550
Operating Current (Max)			A	5.6	7.0	7.0	10.0
Indoor Unit	Input	Rated	kW	0.024	0.024	0.031	0.037
	Operating Current(Max)		A	0.25	0.25	0.31	0.35
	Dimensions	H*W*D	mm	280-838-235	280-838-235	280-838-235	280-838-235
	Weight		kg	9	9	9	9
	Air Volume (Lo-Mid-Hi-SHi(*3))(Dry/Wet))	Cooling	m^3/min	4.2 - 5.2 - 6.8 - 8.7 - 10.9	4.2 - 5.2 - 6.8 - 8.7 - 10.9	4.2 - 5.2 - 6.8 - 8.7 - 13.2	6.3 - 7.6 - 9.0 - 11.0 - 13.2
		Heating	m^3/min	4.2 - 5.0 - 6.8 - 9.0 - 11.9	4.2 - 5.0 - 6.8 - 9.0 - 11.9	4.2 - 5.0 - 6.8 - 9.0 - 11.9	6.0 - 7.8 - 9.9 - 11.9 - 14.1
	Sound Level (SPL) (Lo-Mid-Hi-SHi(*3))	Cooling	dB(A)	19 - 22 - 30 - 37 - 43	19 - 22 - 30 - 37 - 43	19 - 22 - 31 - 38 - 46	29 - 33 - 36 - 40 - 46
		Heating	dB(A)	20 - 23 - 30 - 37 - 43	20 - 23 - 30 - 37 - 43	20 - 23 - 30 - 37 - 44	29 - 33 - 38 - 43 - 48
	Sound Level (PWL)	Cooling	dB(A)	57	57	60	60
Outdoor Unit	Dimensions	H*W*D	mm	538-699-249	538-699-249	538-699-249	550-800-285
	Weight		kg	23	24	24	35
	Air Volume	Cooling	m^3/min	30.3	32.2	32.2	30.4
		Heating	m^3/min	30.3	32.2	34.6	32.7
	Sound Level (SPL)	Cooling	dB(A)	50	50	52	50
		Heating	dB(A)	50	50	52	51
	Sound Level (PWL)	Cooling	dB(A)	63	63	64	64
	Operating Current (Max)		A	5.3	6.7	6.7	9.6
	Breaker Size		A	10	10	10	12
Ext. Piping	Diameter	Liquid/Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7
	Max.Length	Out-In	m	20	20	20	20
	Max.Height	Out-In	m	12	12	12	12
Guaranteed Operating Range (Outdoor)		Cooling	℃	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46
		Heating	℃	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24

(*1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO_2, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.
The GWP of R32 is 675 in the IPCC 4th Assessment Report.
(*2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
(*3) SHi: Super High
(*4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".
(*5) Please see page 51-52 for heating (warmer season) specifications.